

ZB-Stick with OpenHAB

This document describes how to use POPP ZB-Stick with existing Home Automation platform called OpenHAB (<https://www.openhab.org/>).

POPP ZB-Stick firmware version, referenced in this guide: **6.0.3**

OpenHab2 software version, referenced in this guide: **v2.5.10**

This guide focuses on:

- Connect POPP ZB-Stick to the target Host system
- Setup Zigbee Home Automation Binding in OpenHAB
- Troubleshooting
- Zigbee devices Pairing and Removal
- Zigbee devices examples

This guide DOES NOT focus on OpenHAB (openHABian) installation and initial configuration. Please follow the official instructions <https://docs.openhab.org/installation/openhabian.html>.

Table of Contents

Introduction	Fehler! Textmarke nicht definiert.
Initial setup and connection	Fehler! Textmarke nicht definiert.
OpenHAB ZigBee configuration.....	5
Raspberry Pi Serial Configuration.....	Fehler! Textmarke nicht definiert.
Setup Logging (optional)	5
Configure ZigBee Binding	5
ZigBee HA Binding Usage	7
Add your devices to the OpenHAB	7
Remove your device from OpenHAB.....	7
Example: Ikea White E26 Lamp.....	7
Troubleshooting	Fehler! Textmarke nicht definiert.
There is no /dev/ttyAMA0 port shown	Fehler! Textmarke nicht definiert.
OpenHAB ZigBee Binding is OFFLINE.....	10
ZigBee Binding is ONLINE, but no device added during Scan period	10
There are no packets from the device at all.....	10

Introduction

POPP ZB-Stick can be used with a generic Linux machine with OpenHAB installed.

OpenHAB installed and running




POPP ZB-Stick can be used with Raspberry Pi with OpenHABian installed.



Initial setup and connection

This guide does not cover OpenHAB (openHABian) installation. We assume, that you can access OpenHAB Web Interface using your browser.

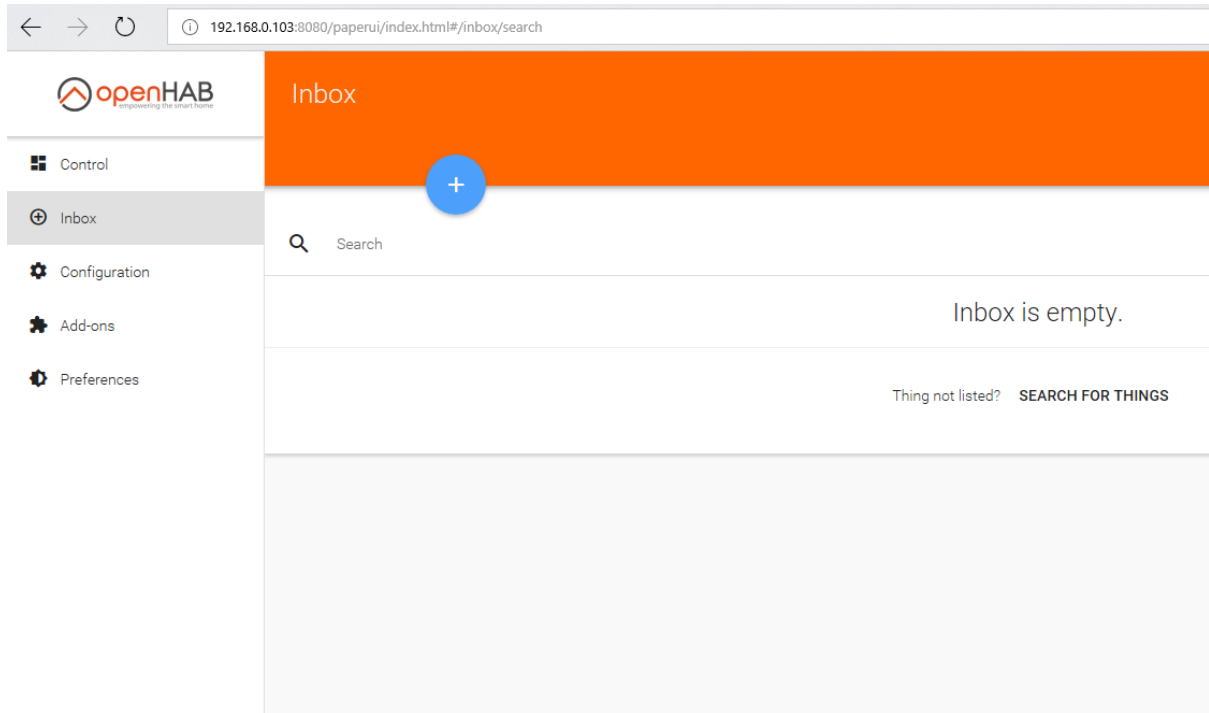

Insert the POPP ZB-Stick into your Host machine.

OpenHAB Zigbee configuration

To work with POPP ZB-Stick Adapter from OpenHAB we are using Zigbee Home Automation Binding (<https://docs.openhab.org/addons/bindings/zigbee/readme.html>). We need to install it additionally, as it is not installed by default.

Setup Logging (optional)

To spot any potential issues it's good practice to enable logging, at least during the setup and installation period. To do it:


- Connect to the OpenHAB SSH console using your favourite tool (login:password **openhabian:openhabian**)
`ssh openhabian@192.168.0.103`
- Connect to "Karaf Console" with the following command (more about it you can read here (<https://docs.openhab.org/administration/console.html>)):
`ssh -p 8101 openhab@localhost`
- Run 2 commands:
`log:set debug org.openhab.binding.zigbee`
`log:set debug com.zsmartsystems.zigbee`
`log:set info com.zsmartsystems.zigbee.dongle.ember.internal.ash`
- Exit "Karaf Console" with Ctrl+D keyboard combination

Now you can view the logs either in the web browser or in the SSH console with the following command (<https://docs.openhab.org/administration/logging.html>) :

```
openhab-cli showlogs
```

Configure Zigbee Binding

To setup Zigbee Home Automation binding to work properly with POPP ZB-Stick, one need to install the Zigbee Binding in the Add-ons section of the Paper UI. Pay attention, that you need version **>= v2.5.10**. Previous versions do not allow to use Software Flow Control.

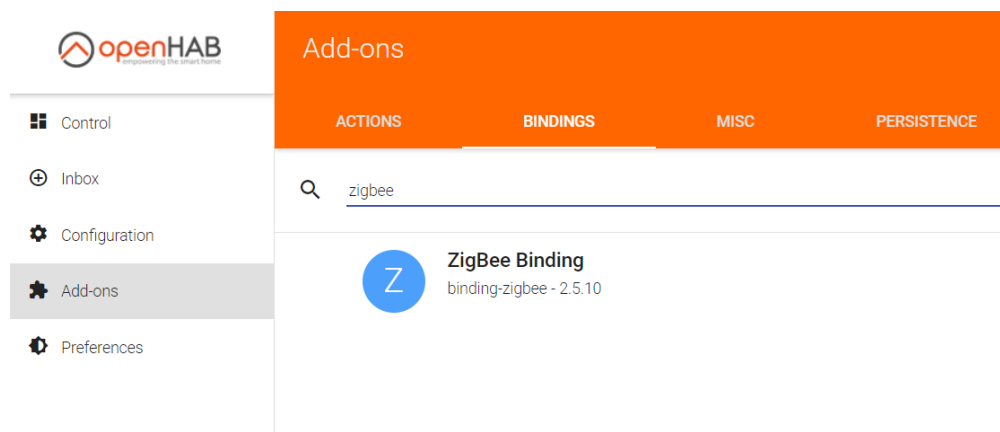

Once installed you can go to the **Configuration->Things** section of the menu and add new **Thing**. Select **Zigbee Binding -> Ember EM35x Coordinator** and then Configure it properly:

- Select **/dev/ttyUSB0** as Serial Port. If not seen, go to Troubleshooting section.


- Select **None** as Flow Control.
- Select **115200** as BaudRate.

Save new Thing.

The screenshot shows the OpenHAB Configuration Parameters page for the Ember EM35x Coordinator. The page has a left sidebar with navigation options: Control, Inbox, Configuration, System, Bindings, Services, Things (selected), Items, Add-ons, and Preferences. The main content area is titled 'Configuration Parameters' and contains several configuration sections:

- Serial Port Configuration:** Port is set to /dev/ttyUSB0, Baud Rate is set to 115200, and Flow Control is set to None.
- Ember NCP Configuration:** Power Mode is set to Normal, and Transmit Power is set to Normal.
- Child Aging Timeout:** Set to 1 Day.
- Network Size:** Set to Medium.

When added, it will take up to 10 seconds to Initialise the component. If successful, then it will indicate as **ONLINE**. If it doesn't change to **ONLINE** go to Troubleshooting section.

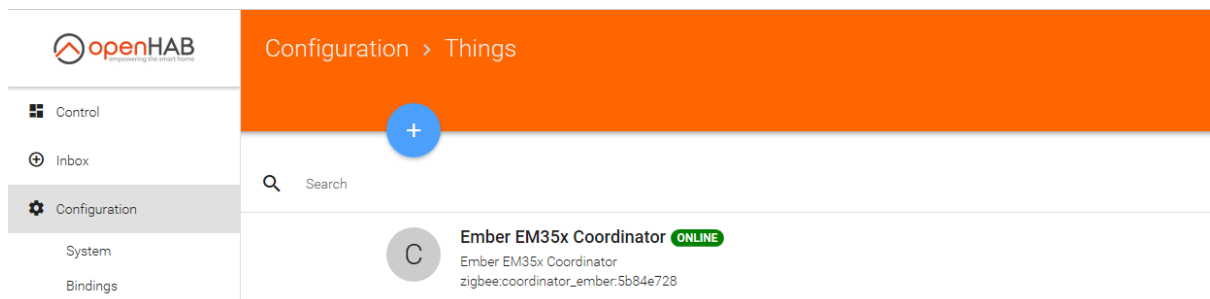


The Zigbee Binding is now configured, and you can start using it.

Zigbee OpenHAB Binding Usage

Once Zigbee Binding is added and configured properly you can start to use it.

Add your devices to the OpenHAB

Open the **Inbox** section and press the scan button.

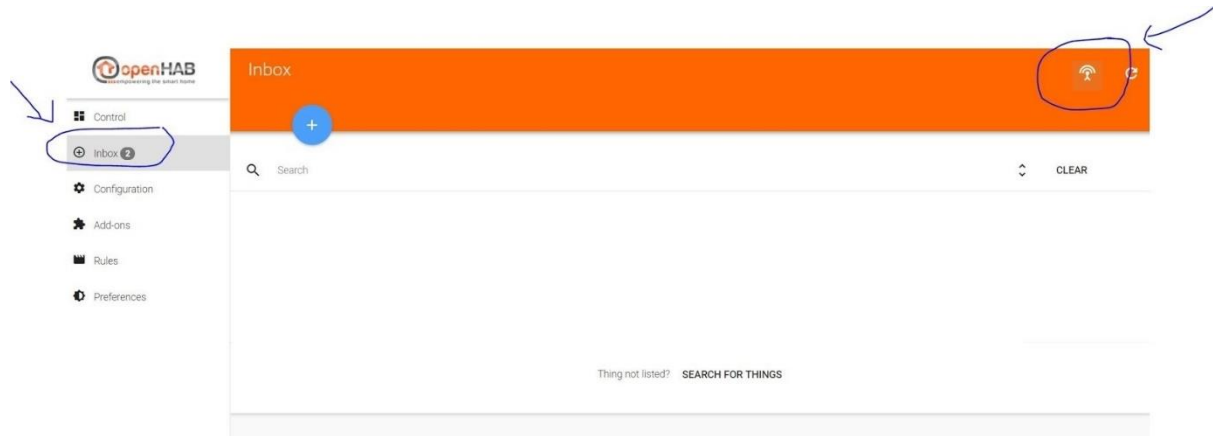

When you will call it, you have 60 seconds to add the device. It's easier to track the process in the logs. During this period, you need to follow Device manual to put it in Association mode. Sometimes you just need to give it power.

If the device is found, you will be able to see it in the logs and in the Web UI.

Remove your device from OpenHAB

Open **Configuration->Things** menu and press **Delete** button near the device.

Example: Ikea White E26 Lamp

This example is done with Ikea White E26 lamp. but is applicable to other products as well.




To control Ikea E26 bulb using OpenHAB, one first needs to reset it.

Once it is reset, you can follow the regular process to Add it to the OpenHAB.


- Call Scan procedure using Zigbee Binding

- Power ON the Lightbulb
- Confirm it's added to the OpenHAB


Now you can control it directly or use in the scenarios.

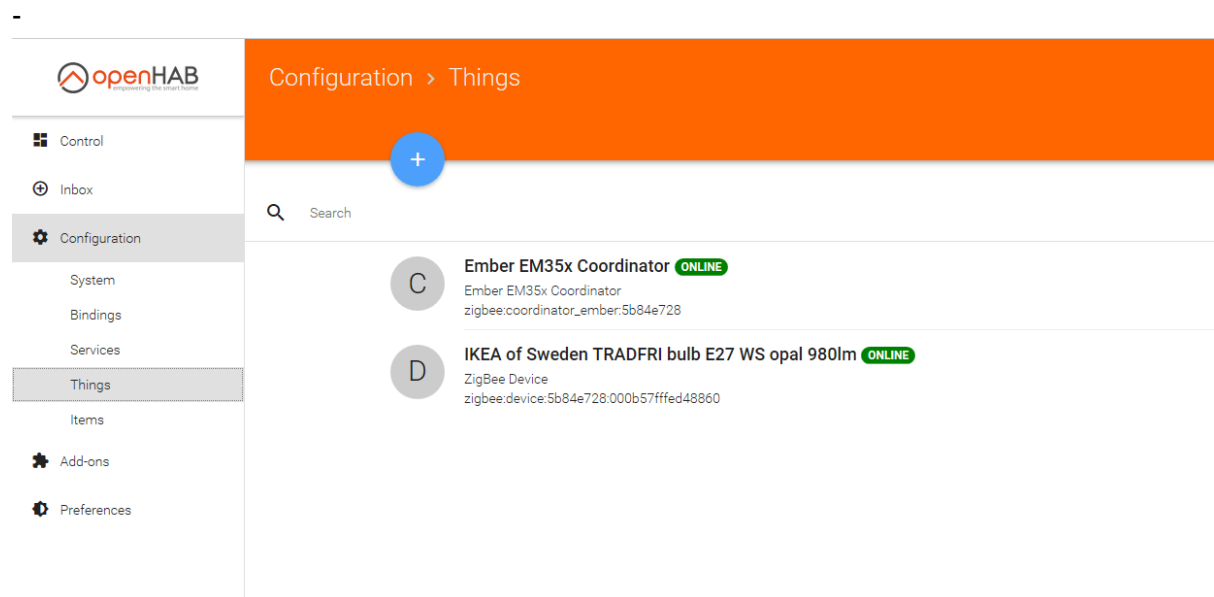


Once device is added, you can configure it and create new control elements for it:

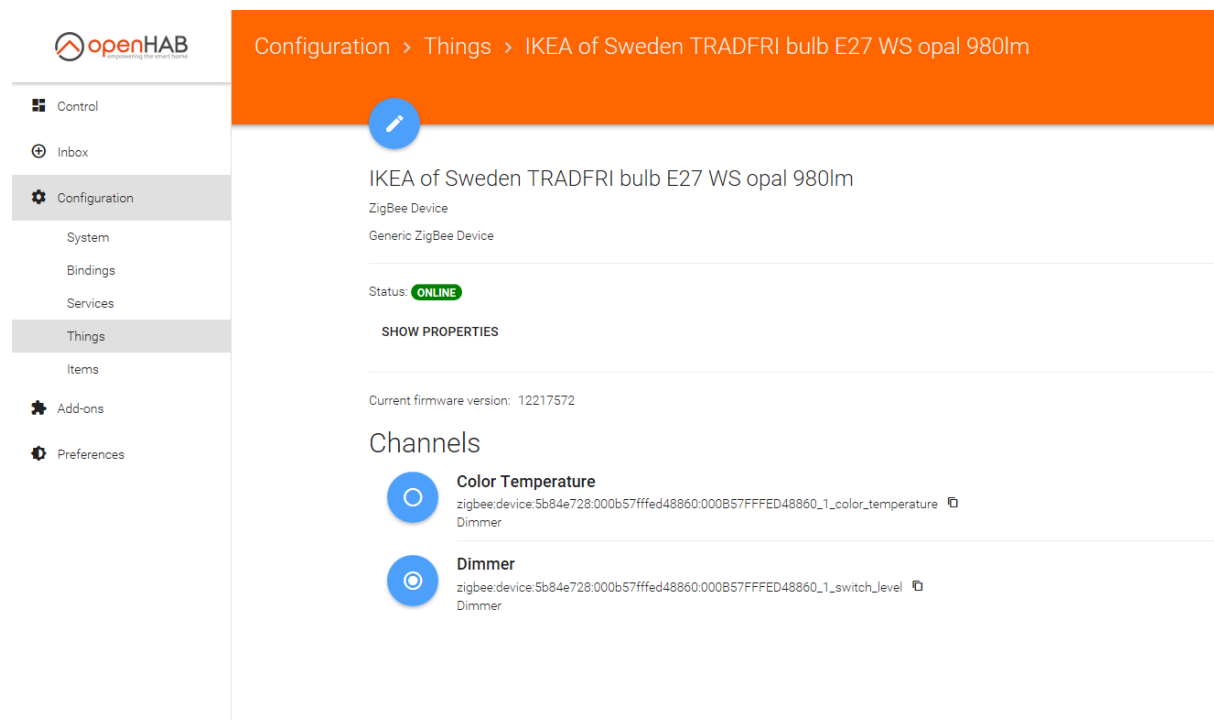


Then it's available for control.

 Control

 Inbox

 Configuration

 Add-ons

 Preferences

IKEA of Sweden TRADFRI
bulb E27 WS opal 980lm



Dimmer

0 %



Troubleshooting

If your issue is not described here or you need help resolving it, please contact support at **info@popp.eu**

OpenHAB Zigbee Binding is OFFLINE

If you have configured ZigBee Binding properly but it doesn't change its status within 10 seconds, start looking into the logs. If there is practically no log activity, just a few packets from OpenHAB to /dev/ttyUSB0, then probably Serial Interface is configured not properly.

Zigbee Binding is ONLINE, but no device added during Scan period

First, investigate the logs and confirm you can see the start of the communication between OpenHAB and POPP ZB-Stick. If there is any error, contact us at **info@popp.eu**.

There are no packets from the device at all

This most probably means that your device is already part of the different network and just can't join your new network. Try to reset it, using the manufacturer specific reset procedure.